

Date of Application and filing Complete Specification Aug. 1, 1947. No. 20905/47.

Application made in Italy on Aug. 9, 1946. Complete Specification Published May 16, 1951.

Index at acceptance:—Classes 97(iii), 13; and 143, B2.

## COMPLETE. SPECIFICATION

## A Scale for the Rapid Determination of the Moisture Content in Solid Louies

We, FRATELLI BÜHLER, an Italian Body Corporate organized under Italian Law, of Via Goldoni, 17, Milan, Italy, do hereby declare the nature of this 5 invention and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement: ---

The present invention relates to an 10 apparatus for measuring the moisture content in solid bodies and particularly in cereals in general. The invention is concerned with apparatus of the kind in which a weighing device is positioned 15 below a heating or drying chamber, with means on said weighing device passing upwardly into the drying chamber to lift the bodies being treated from their sup-

port and allow of their being weighed. The apparatus of the present invention differs from those already known, in that, the various parts are contained in a single unit so as to ensure good operational conditions being maintained at all times.

25 Thus the several conditions which are liable to produce error as, for example, varying room conditions such as varying temperature, humidity, and air currents, are eliminated.

The scale according to the present invention comprises a frame, a drying chamber having its bottom wall apertured and supported by said frame and provided with a vertical member passing 85 through said bottom wall for supporting material to be weighed, and is characterized in that the said drying chamber is supported by said frame in a vertically slidable manner, means being provided

40 for raising and lowering said drying chamber and in that a plate or like support is provided for the material which support freely rests in said drying chamber at a level which is higher than the 48 upper end of said vertical member when

the drying chamber is raised, and rests on said upper end when the drying chamber is lowered, and said vertical member

being operatively connected to a weigh-

ing device.
The invention may be further characterised in that a second support for material is provided at the lower end of said vertical member, external to said drying chamber, on which moist 55 materials may be weighed by the same weighing device when the upper support is raised out of engagement with said member by the raising of the drying chamber.

In one embodiment of the invention, illustrated by way of example in the accompanying drawing, the apparatus consists of a supporting tripod 1, provided with adjusting screws (not shown) 65 for the true ievelling of a central body 2 containing the weighing device, and a thermostatic drive 2 consists of a thermostatic drier 3 consisting of an insulated metal box provided with heating elements not shown for the sake of 76 clarity.

In the base of the drier 3, three holes are provided for the passage therethrough of the trident end 4 of the rod 5. Above this trident end, is the plate 8' on which 75 is placed the sample to be examined, the said plate becoming supported by the end 4 by suitably lowering the drier 3 by means of a suitable mechanism (not shown in the drawing). The lid of drier carries a vent 6 for the outlet of the steam generated from the sample during its "drying-up". The moisture percentage may be read from a suitably graduated dial 10, of the weighing device in the 85 body 2.

The rod 5 has a knife-edge engagement with the yoke 7 of the weighing device 11, and it will be apparent that the said rod will support both, the lower plate 8 located within the tripod 1 and the upper plate 81 located in the drier 3, when the said drying chamber is lowered to cause the plate 8<sup>1</sup> to be lifted from its supports 9 by means of the trident effd 4.

In use, a quantity of the untreated

Pri

## BEST AVAILABLE COPY

material is placed on the lower support 8, to counterbalance? the weighted end of the scale member 11 with the pointer reading at zero on the scale. That material 8 is then transferred to the upper support 8' and heated with the chamber 3 raised. After heating, the chamber 3 is raised bringing the plate 8' on to the trident 4, and the loss of weight is then read on the 10 scale 10.

When the apparatus is in operation, with the thermal drying chamber raised, that is, during the drying-up of the sample under examination, the same 15 weighing means will allow a new weight measurement being made of the damp materials on the lower plate 8, thus making possible a continuous operation, which has not hitherto been possible with 20 apparatus of this kind.

Having now particularly described and ascertained the nature of our said invention and in what manner the same is to be performed, we declare that what we 25 claim is:—

1. An apparatus for the rapid determination of the moisture content in solid bodies, comprising a drying chamber having its bottom wall apertured and supported by a frame and provided with a vertical member passing through said bottom wall for supporting material to be weighed, characterised in that the

said drying chamber is supported by said frame in a vertically slidable manner. 35 means being provided for raising and lowering said drying chamber, and in that a plate or like support is provided for the material which support freely rests in said drying chamber at a level 40 which is higher than the upper end of the said vertical member when the drying chamber is raised, and rests on said upper end when the drying chamber is lowered, and said vertical member being operatively connected to a weighing device.

2. An apparatus according to Claim 1 characterised in that a second support for material is provided at the lower end of said vertical member, external to said drying chamber on which moist materials may be weighed by the same weighing device when the upper support is raised out of engagement with said member by the raising of the drying chamber.

3. An apparatus for the rapid determination of the moisture content in solid bodies constructed, arranged and adapted to operate substantially as herein described with reference to and as illustrated in the accompanying drawings.

Dated this 25th day of July, 1947.

For the Applicants:


E. K. DUTTON & CO.,

Chartered Patent Agents,

54-56, Market Street, Manchester, 1.

Learnington Spa: Printed for His Majesty's Stationery Office, by the Courier Press.—1951. Published at The Patent Office, 25, Southampton Buildings, London, W.C.2, from which copies, price 2s. per copy; by post 2s. ld. may be obtained.

/ said Amer. 35 and ai in 653,513 COMPLETE SPECIFICATION wided freely level 40 of the rying upper rered, pera- 45 ice. aim 1 ort for ind of said 60 terials ghing raised er by 55 deter-, solid apted destrated 60 17. r, 1. 151. ricb

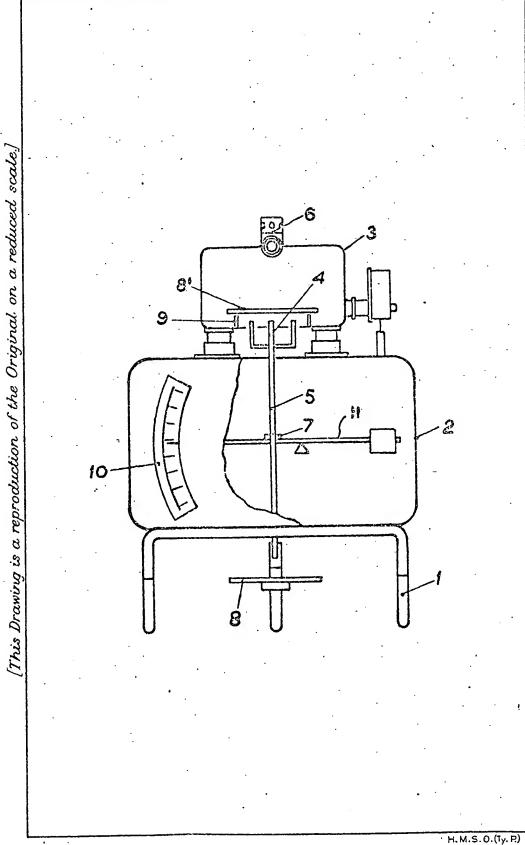

I SHEET

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)